2-6-03
KM.

OFF SET SEAM PROPOSAL

SKETCH CREATED FOR PATENT SEARCH.
IRVIN AUTOMOTIVE – KIM MURLEY
FEBRUARY 6TH, 2003

VIEW OF OVERCAST

CURRENT METHOD

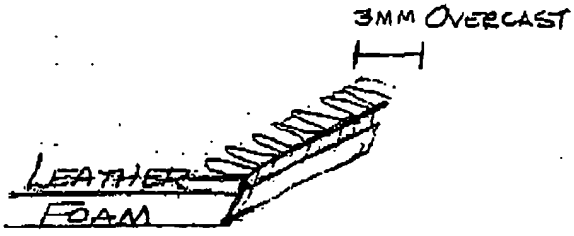

OVERCAST SEWS TO OUTER EDGE OF BOTH EVENLY STACKED MATERIALS. 3MM OF LEATHER AND 3MM OF FOAM SEWN IN THIS STYLE.

OFF SET METHOD

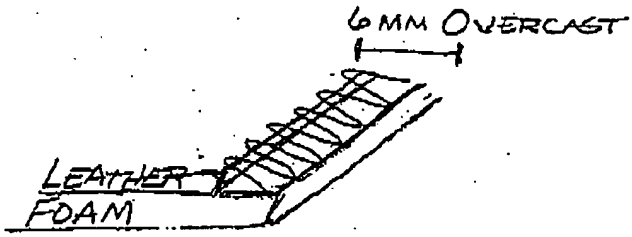

OVERCAST SEWS TO OUTER EDGE OF FOAM WHILE THE INBOARD SIDE OF THE STITCH SEWS TO THE EDGE OF THE OFF SET MATERIAL. 2MM OF LEATHER AND 6MM OF FOAM SEWN IN THIS STYLE.

VIEW OF JOIN / FRENCH

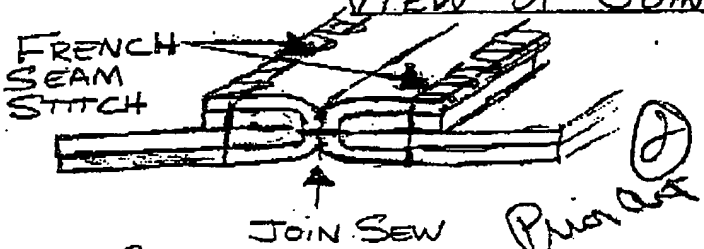

CURRENT METHOD

* NOTE: FRENCH SEAM THRU BOTH LEATHER & FOAM ON SELVAGE SIDE

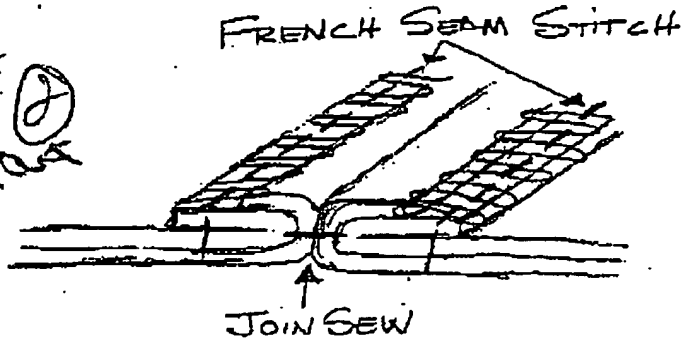

OFF SET METHOD

* NOTE: FRENCH SEAM THRU FOAM ON SELVAGE SI

OFF SET SEAM PROPOSAL

2·3·03
K.M.

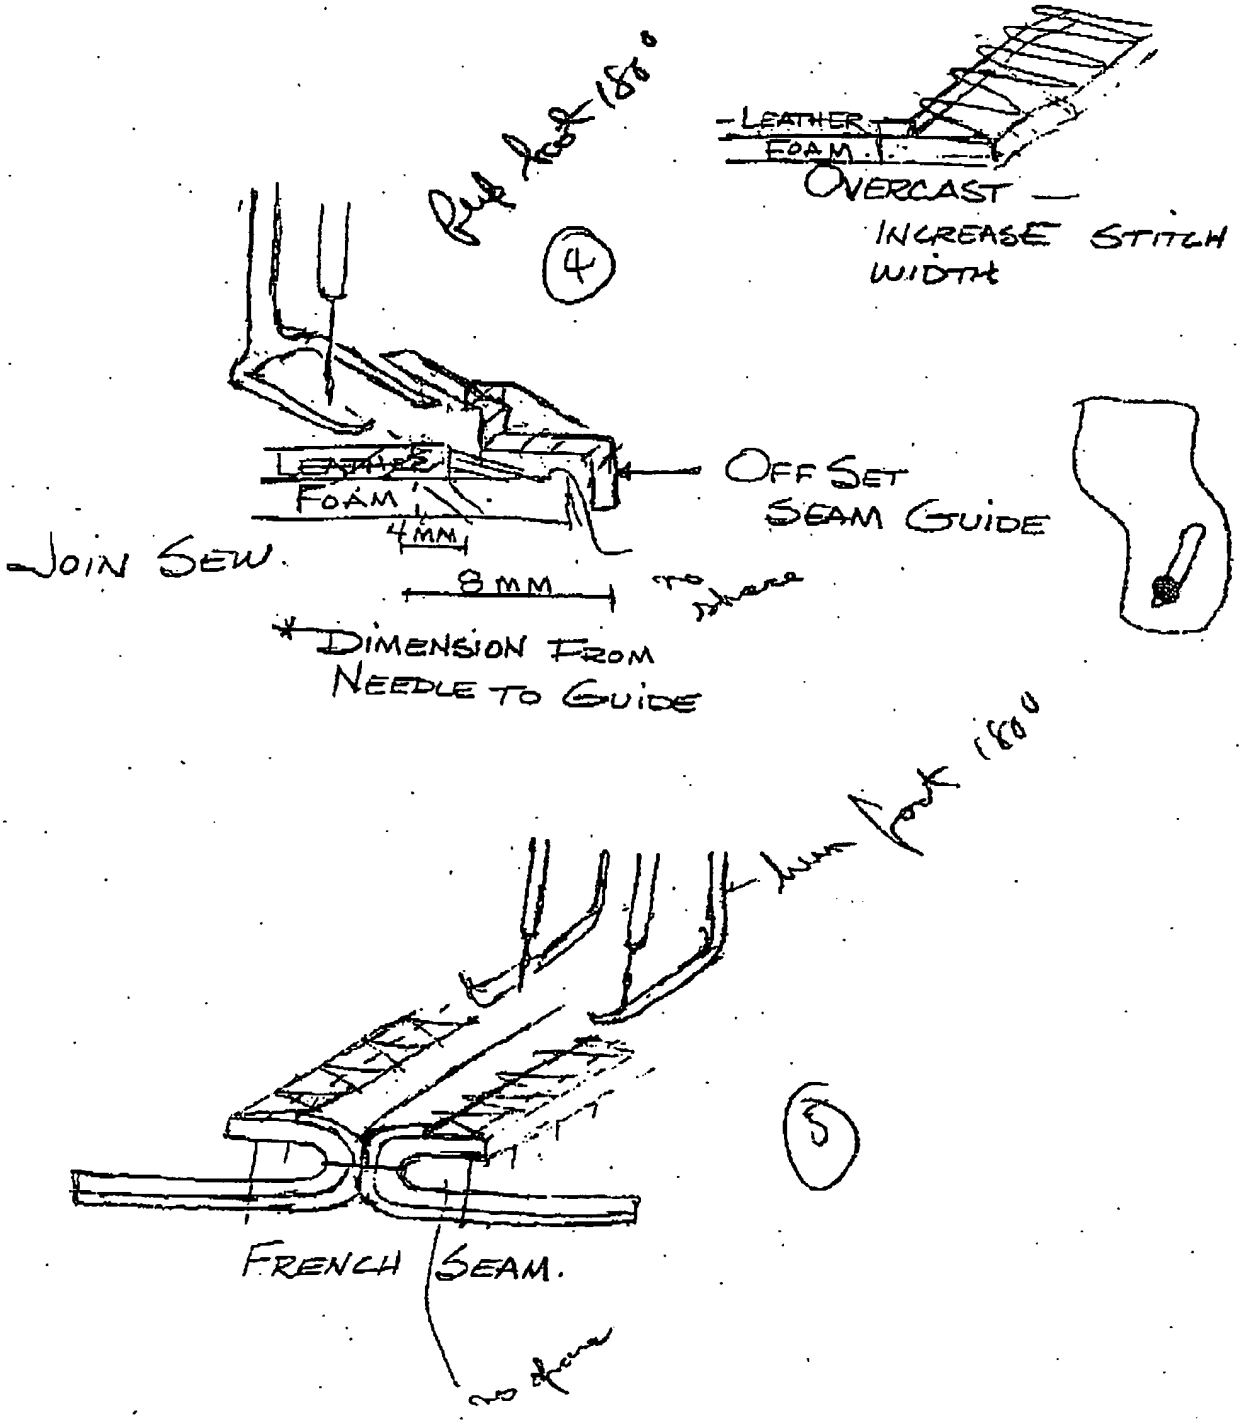

2.6.03
KM.

Join / French

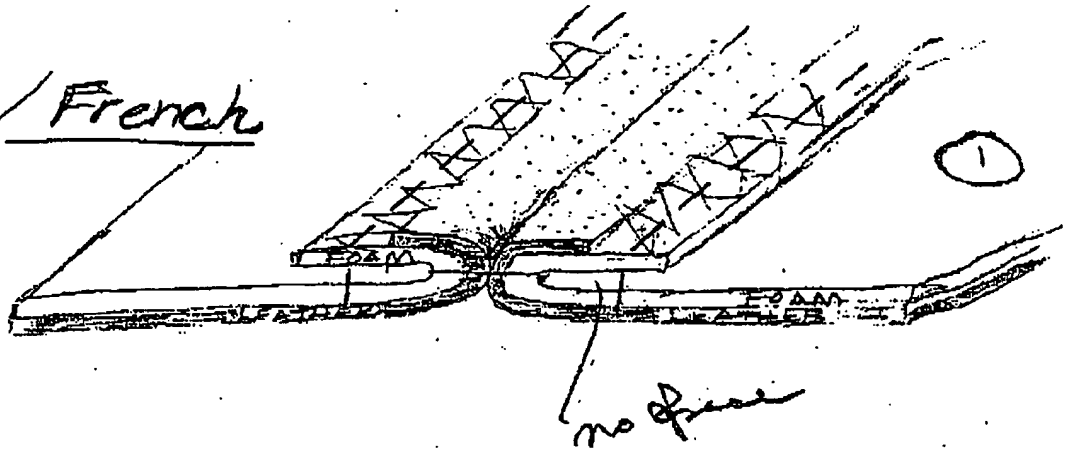

1

Join

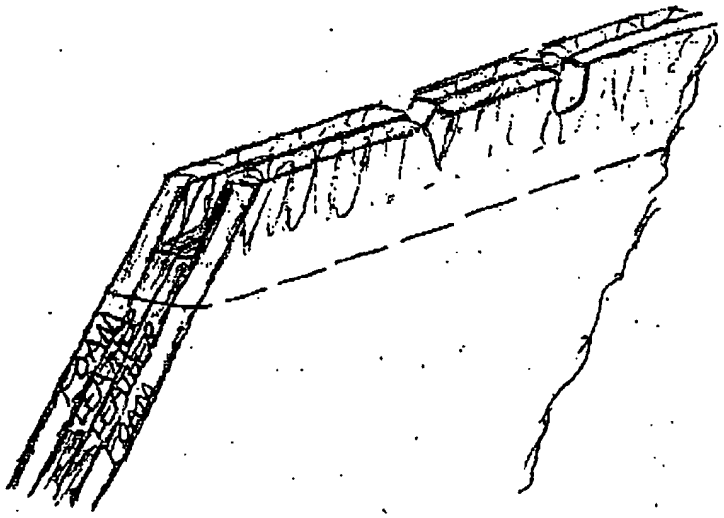

3

2-4-03
KM.

800 Proposal-
OFF Set Seam.

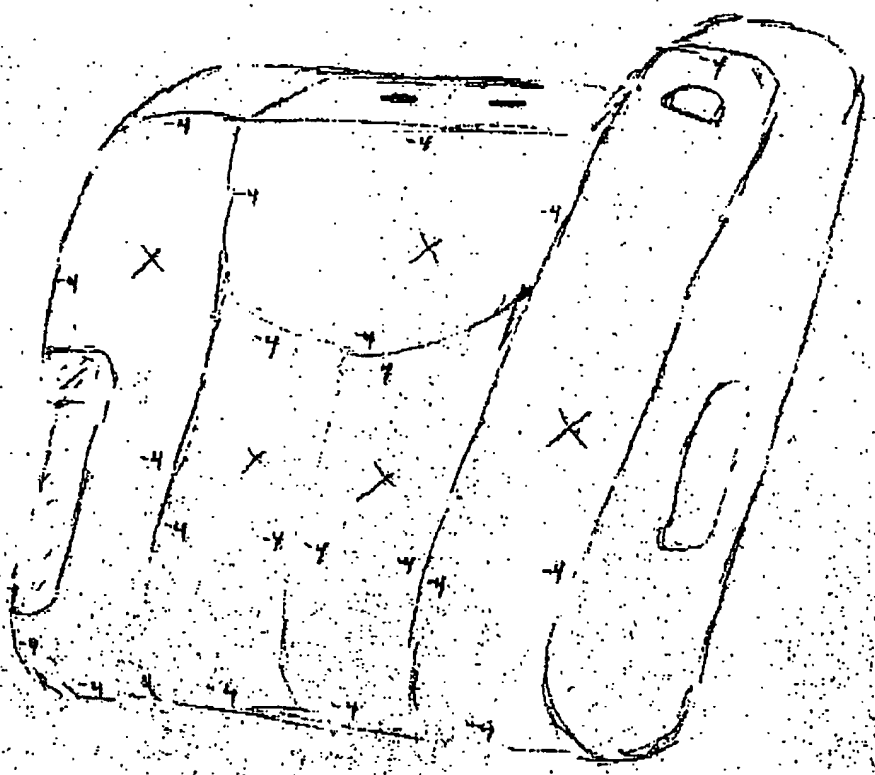

REDUCED
LEATHER
PERIMETERS

A95 Front Seat Back
Driver